

Filament Electrode



| Length | Diameter | Thickness | Material |
|--------|----------|-----------|------------|
| 2.500" | .196" | n/a | Molybdenum |

Electrode




| Length | Diameter | Thickness | Material |
|--------|----------|-----------|------------|
| 1.500" | .250" | n/a | Molybdenum |

Molybdenum Disk



| Length | Diameter | Thickness | Material |
|--------|----------|-----------|------------|
| n/a | .377" | .110" | Molybdenum |

Molybdenum Bolt

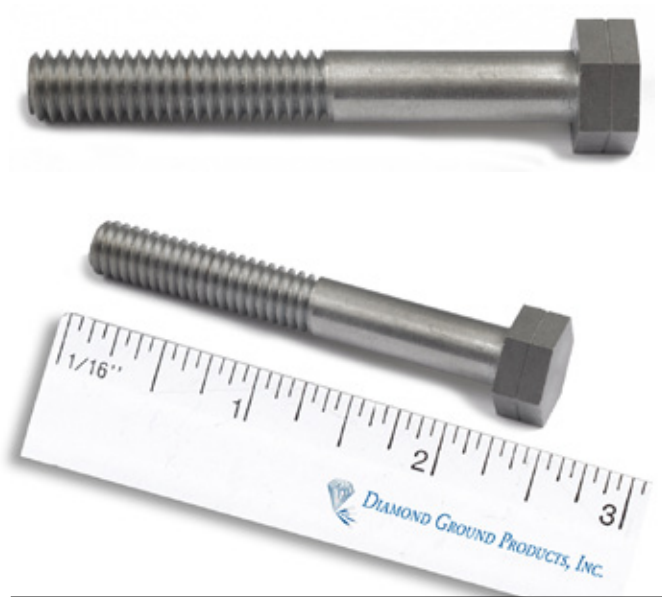

| Length | Diameter | Thickness | Material |
|--------|----------|-----------|------------|
| 2.540" | .305" | n/a | Molybdenum |

Filament Clamp




| Length | Diameter | Thickness | Material |
|--------|----------|-----------|------------|
| .350" | .250" | n/a | Molybdenum |

Molybdenum Disk



| Length | Diameter | Thickness | Material |
|--------|----------|-----------|------------|
| n/a | .870" | .200" | Molybdenum |

Custom Electrodes

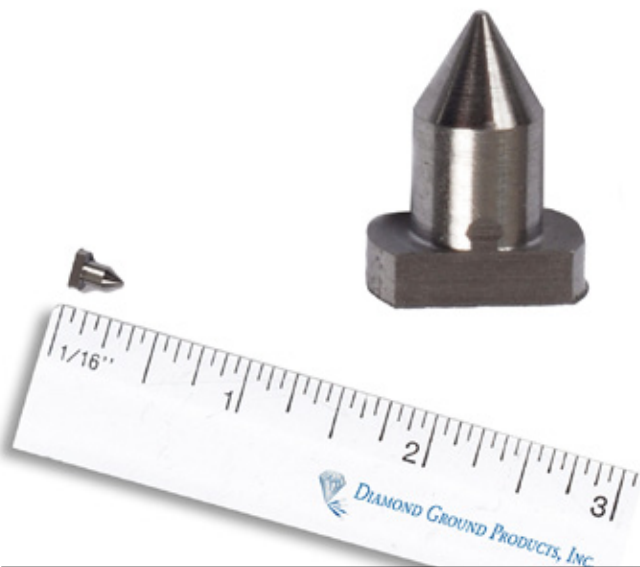

| Length | Diameter | Thickness | Material |
|--------|----------|-----------|----------------|
| .208" | n/a | .094" | 2% Lanthanated |

Custom Electrodes



| Length | Diameter | Thickness | Material |
|--------|----------|-----------|----------------|
| 1.030" | .125" | n/a | 2% Lanthanated |

Anode



| Length | Diameter | Thickness | Material |
|--------|----------|-----------|--------------------|
| n/a | 1.125" | .500" | Pure VM Lamp Grade |

Anode



| Length | Diameter | Thickness | Material |
|--------|----------|-----------|--------------------|
| 3.250" | 1.00" | n/a" | Pure VM Lamp Grade |

Anode



| Length | Diameter | Thickness | Material |
|--------|----------|-----------|--------------------|
| 1.620" | .370" | n/a | Pure VM Lamp Grade |

2% Thoriated Electrode Press-Fit into Brass



| Length | Diameter | Thickness | Material |
|--------|----------|-----------|--------------------|
| 1.720" | .233" | n/a | 2% Thoriated/Brass |

Threaded and Slotted Screw



| Length | Diameter | Thickness | Material |
|--------|----------|-----------|--------------|
| .518" | .190" | n/a | 2% Thoriated |

Tungsten Probe



| Length | Diameter | Thickness | Material |
|--------|----------|-----------|--------------|
| 1.750" | .315" | n/a" | 2% Thoriated |

Electrode



| Length | Diameter | Thickness | Material |
|--------|----------|-----------|--------------|
| 1.00" | .240" | n/a | 2% Thoriated |

Custom Electrode/.035" Tip Diameter



| Length | Diameter | Thickness | Material |
|--------|----------|-----------|--------------|
| 1.070" | .093" | n/a | 2% Thoriated |

Custom Electrode/.050" Tip Diameter



| Length | Diameter | Thickness | Material |
|--------|----------|-----------|--------------|
| 1.500" | .125" | n/a | 2% Thoriated |


Stepped Electrode

From .125" to .081" to .036" to .020"



| Length | Diameter | Thickness | Material |
|--------|----------|-----------|--------------|
| 3.00" | .125" | n/a" | 2% Thoriated |

Custom Electrode/.030" Tip Diameter

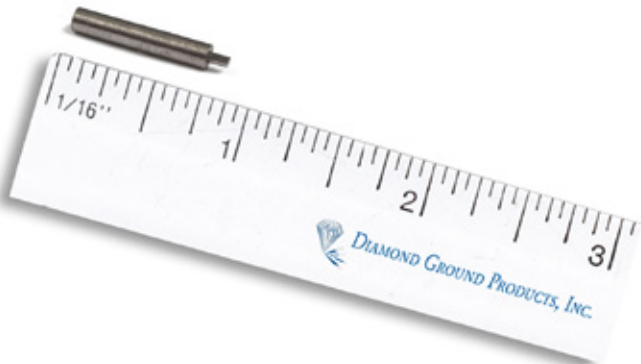

| Length | Diameter | Thickness | Material |
|--------|----------|-----------|--------------|
| .802" | .125" | n/a | 2% Thoriated |

Tweezer Electrodes



| Length | Diameter | Thickness | Material |
|--------|----------|-----------|----------|
| .260" | .100" | n/a | Tri-Mix |

Molybdenum Disk



| Length | Diameter | Thickness | Material |
|--------|----------|-----------|------------|
| n/a | 4.05" | .225" | Molybdenum |

Fluted Electrode



| Length | Diameter | Thickness | Material |
|--------|----------|-----------|------------------|
| 7.00" | .157" | n/a" | 1.5% Lanthanated |

Parallel Gap Welding Electrode




| Length | Diameter | Thickness | Material |
|--------|----------|-----------|--------------|
| 3.41" | .125" | n/a | 2% Thoriated |

Molybdenum Disk



| Length | Diameter | Thickness | Material |
|--------|----------|-----------|------------|
| N/A | 3.70" | .165" | Molybdenum |

Molybdenum Tube

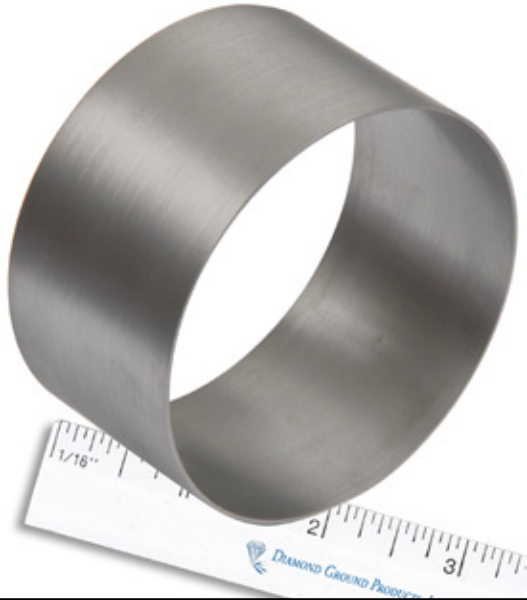

| Length | Diameter | Thickness | Material |
|--------|----------|-----------|------------|
| 1.98" | 3.60" | .031 | Molybdenum |